
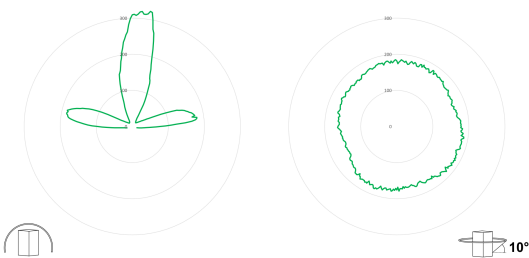




Series V 24J Xenon Strobe Beacons

XFV/AC/115/SH/24J/GREEN

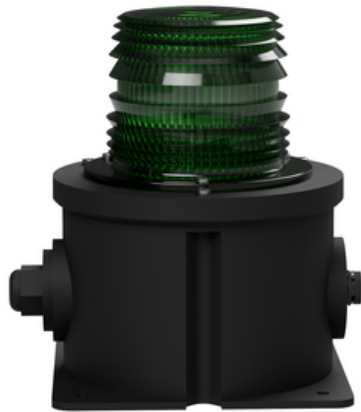

deegree XFX IP65 Xenon Strobe SH 24J Beacon 115Vac Black Base 150mm x 150mm x 189mm Green

A robust xenon strobe warning light with a polycarbonate base and dome lens, available in Red, Amber, Green, Blue, Clear, or Yellow. The unit comes with on-board switches for selecting from four flash rates. Available in 11 Joule and 24 Joule models, designed for 12Vdc, 24Vdc, 115Vac, or 230Vac power supplies (ac or dc). Additional 5 Joule models are available for use on 10-100Vdc (20-70Vac) and 100-130Vdc. Double-flash or Single-flash patterns can be ordered. Beacons from Series T, U, V, and W, along with IAS-T and ISB-T Sounders, can be combined for a complete signaling system.

- o Protective guard and mounting bracket available
- o Suitable for surface or wall mounting
- o Continuously rated
- o 360° light output around the vertical axis
- o 180° light output above the horizontal axis

Electrical Data

Nominal Supply Voltage (V)	115
Supply Type	ac
Voltage Min (V)	98
Voltage Max (V)	132
Nominal Current Draw (A)	0.31
Fuse (A)	0.5
Fuse Type	TD
Fuse (Internal or External)	Internal

Visual Data

Signal Colour	Green
Light Source	Xenon
Flash Energy (J)	24
Luminous Intensity (Cd)	190

General Data

Size (mm)	150mm x 150mm x 189mm
Weight (kg)	0.882
IP Rating	IP65
Mounting Method	Surface mounting
Order Unit	1

Series V 24J Xenon Strobe Beacons

XFV/AC/115/SH/24J/GREEN



Base Colour	Black
Lens Colour	Green
Temperature Limits (C)	-20 to +45

Trade Data

GTIN	5060995746562
Commodity Code	85318070
Country of Origin	GB
RoHS	RoHS3 (EU DIRECTIVE 2015/863) compliant
RoHS Last Verified Date	8th August 2024
SVHC	No SVHC present
SVHC Candidate List Date	27th June 2024